



STARK



STARK RELAX U-PLOW

SNOW CLEARING



- ▶ Suitable for over 10 tons base machines
- ▶ Patented technologies make STARK U-plows the most efficient and versatile
 - The RELAX blade system keeps blades locked resulting in smooth plow trace and considerably less formation of packed snow.
 - Patented SMOOTH MOTION wing turning system with two hydraulic cylinders enable extremely precise, controlled and wide range of motion. The plow is easy to use and work result is excellent.
 - STARK U-plow provides unique maneuverability of snow. Snow can also be collected by reversing with the U-plow. Plowing snow on the embankment is efficient and effortless.
 - FLOATING FRAME closely follows the ground. The sliding plates and the positioning of the flotation reduce bouncing of the plow while working.
 - Multiple hydraulic solutions are available for STARK U-plows.
 - For example, with the RELAX four-action valve, the wings of the U-plough can be moved simultaneously.
 - An even stronger case structure with weldable fittings



STANDARD EQUIPMENT

- ▶ RELAX blade system, SMOOTH MOTION and FLOATING FRAME technologies
- ▶ Adjustable support legs
- ▶ Rotating support plates
- ▶ Edge wear pads
- ▶ Reflectors, hazard taping
- ▶ Led lights set

+ ACCESSORIES

- ▶ Multiple blade options
- ▶ Custom paint
- ▶ Multiple valve options
- ▶ Automatic central lubrication system




www.stark.fi
STARK / Lametal Oy



Lametal Oy reserves the full rights to change at any time without obligation providing equipment, prices and technical solutions, without prior notice.

TECHNICAL DRAWINGS

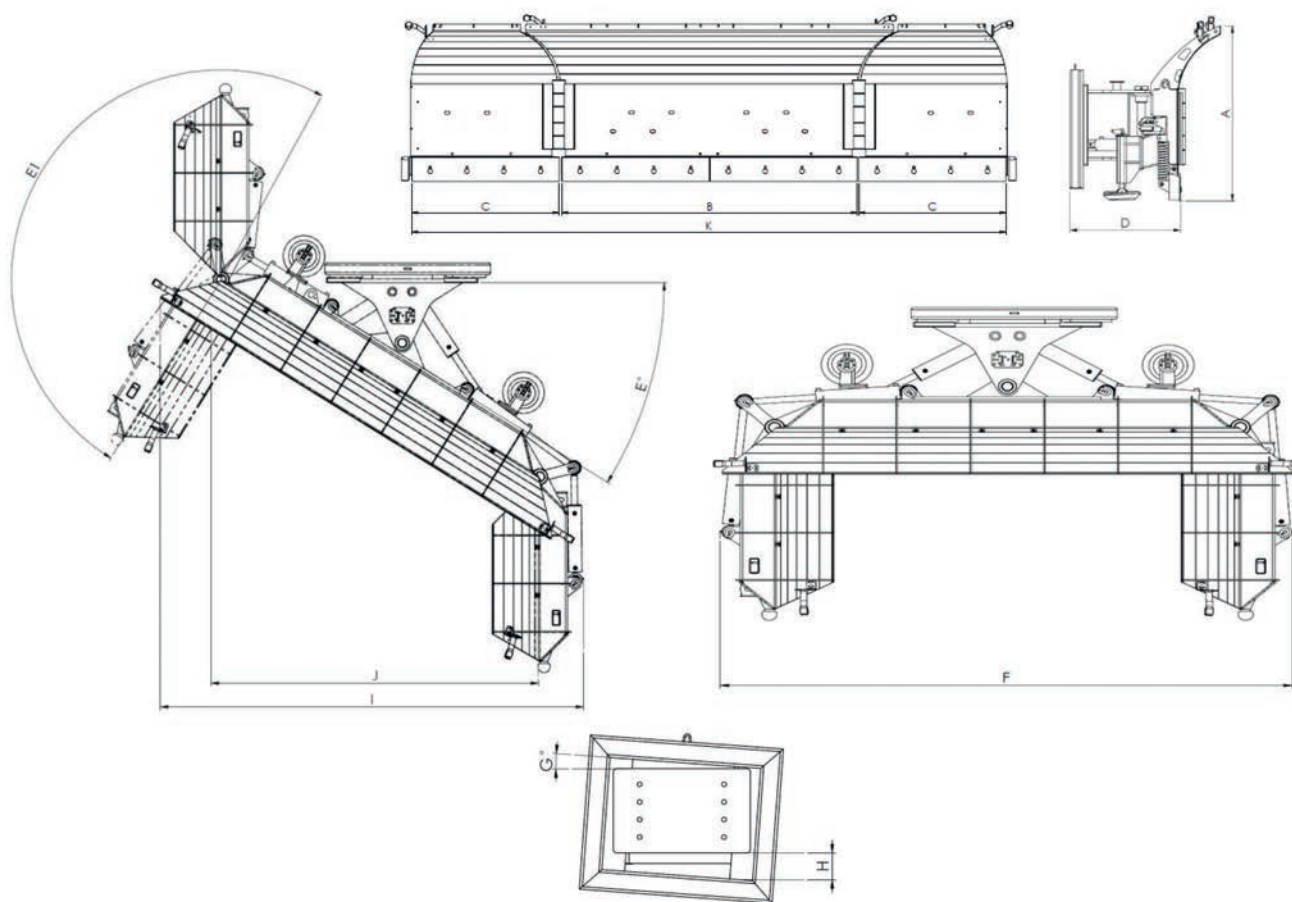

TECHNICAL DIMENSIONS

Product	Wing max. height (mm)	Centre section width (mm)	Wing width (mm)	Distance from fitting (mm)	Turning angle \pm (°)	Turning angle of wings (°)	Wing width in U-formation (mm)	Tilt angle (°)	Flotation height (mm)	Min. width with turning angle (mm)	Min. working width for turning angle (mm)	Cleaning width (mm)	Weight (kg) *
	A	B	C	D	E	E1	F	G	H	I	J	K	
U 4800/2400 RH	1350	2400	1200	950	32	180	3100	7	150	2850	2160	4930	1890
U 5400/2400 RH	1350	2400	1500	950	32	180	3100	7	150	2850	2160	5550	1990
U 5400/3000 RH	1350	3000	1200	950	32	180	3700	7	150	3400	2680	5550	1990
U 6000/3000 RH	1350	3000	1500	950	32	180	3700	7	150	3400	2680	6150	2200
U 6600/3000 RH	1350	3000	1800	950	32	180	3700	7	150	3400	2680	6750	2320

* Weight includes blades and fittings. Weight depends on the fitting type/plow accessories